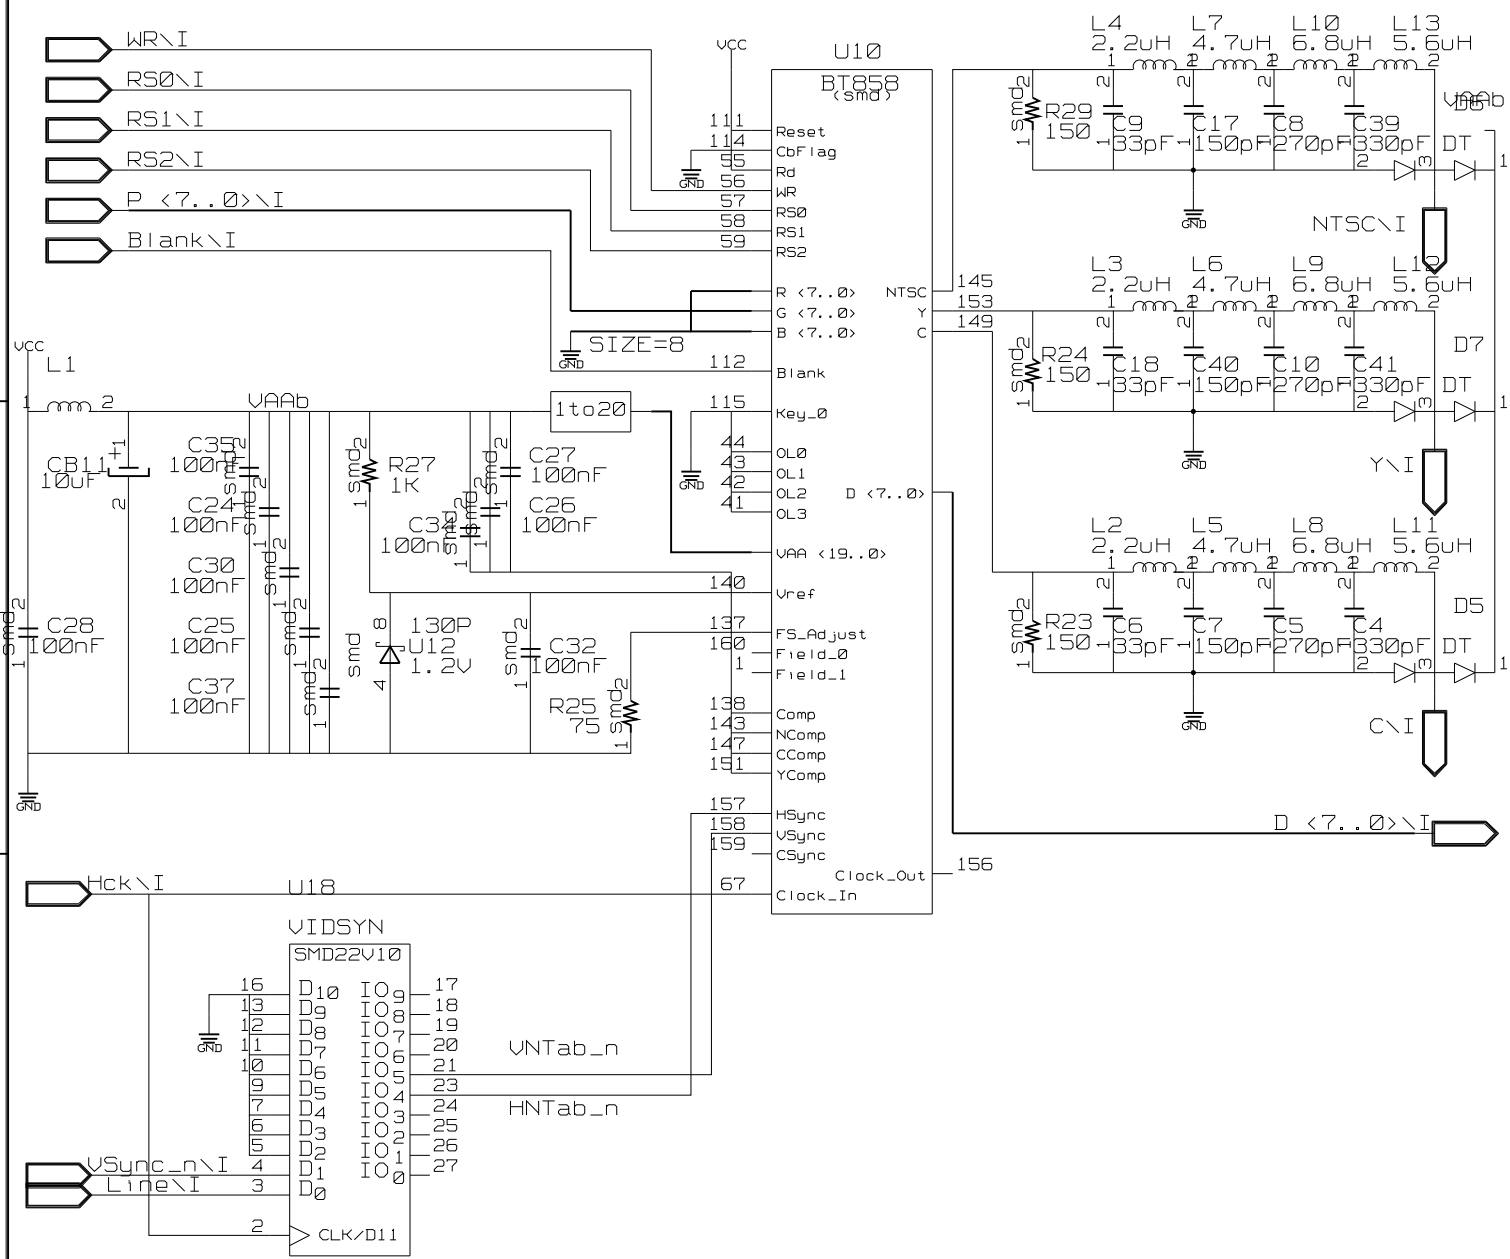

NOTE: Excepting grounds on the 22v10, all grounds on this page are to analog ground.
C28 is to be placed immediately next to pin 1 of U19
C35 is to be placed immediately next to pin 24 of U10 (the bt858)
C24 is to be placed immediately next to pin 63 of U10 (the bt858)
C30 is to be placed immediately next to pin 103 of U10 (the bt858)
C25 is to be placed immediately next to pin 124 of U10 (the bt858)
C37 is to be placed immediately next to pin 148 of U10 (the bt858)
C34 is to be placed immediately next to pin 143 of U10 (the bt858)
C26 is to be placed immediately next to pin 147 of U10 (the bt858)
C27 is to be placed immediately next to pin 151 of U10 (the bt858)
C32 is to be placed immediately next to pin 140 of U10 (the bt858)
Cb11 is to be placed immediately next to pin 2 of U19

TITLE: NTSC-OUT DRAWING	DATE: Thu Feb 16 01:26:48 1995
ENGINEER: Ken Streeter, Tom Toffoli, Frank Honore	PAGE: