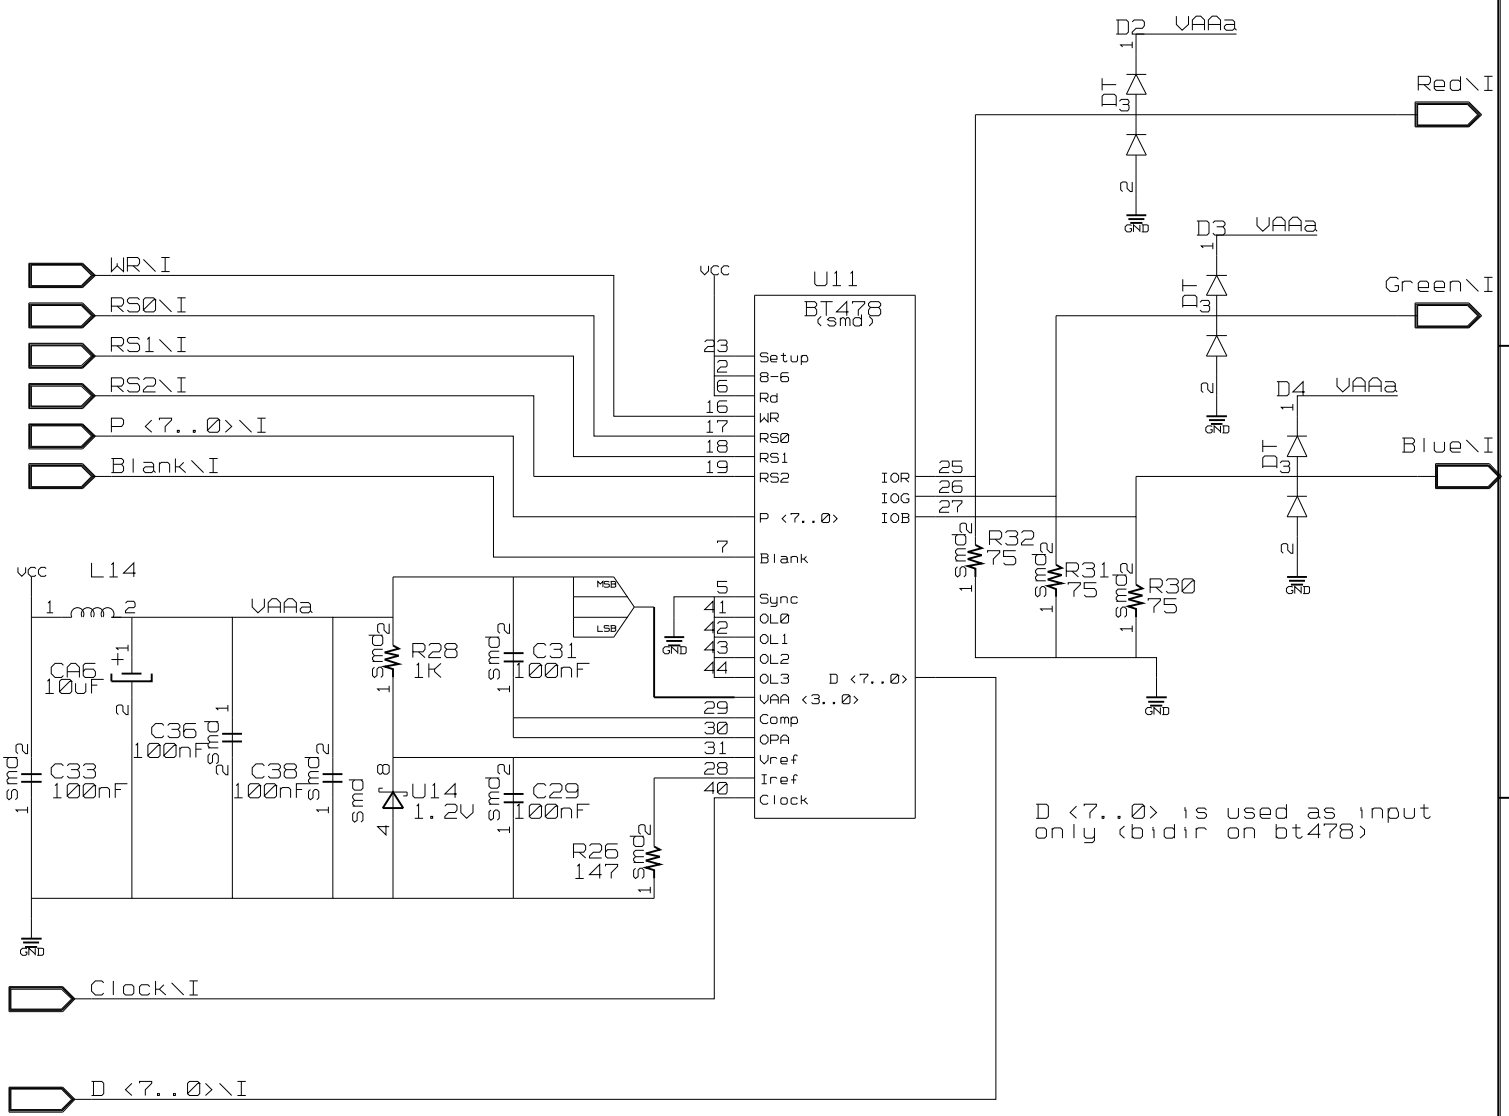

NOTE:

The GND connections on this page are all to be made to the analog ground.
C33 is to be placed immediately next to pin 1 of U20
C36 is to be placed immediately next to pin 4 of U11 (the bt478)
C38 is to be placed immediately next to pin 21 of U11 (the bt478)
Ca6 is to be placed immediately next to pin 2 of U20

TITLE: RGB-OUT DRAWING	DATE: Thu Feb 16 01:27:01 1995
ENGINEER: Ken Streeter, Tom Toffoli	PAGE: